

Bala Bunkie Roof Assembly Instructions

The following pages contain specific instructions on how to assemble your new Summerwood Bala Bunkie. Extensive diagrams and explanations are offered to make it simple (and fun) for those with little or no experience with a project of this nature.



Contents

FLOOR

1. Foundation	6
2. Rim Joists.....	8
3. Floor Joists.....	9
4. Bridging.....	10
5. Runners.....	11
6. Beam	12
7. Floor Sheathing.....	13
8. Pre Assembled Floor Frame.....	15
9. Insulation.....	18
10. P.T. Plywood.....	19

WALLS


1. Two Wall Configurations	20
2. Short Wall Frame With Window.....	21
3. Long Wall Frame Without Window	22
4. Short Wall Frame Without Window.....	23
5. Long Wall With Doors & Windows.....	24
6. Doors & Window Headers.....	25
7. Bottom Rip	26

ROOF


1. Double Top Plates.....	29
2. Inner Common Truss Layout	30
3. Gable End Truss.....	31
4. Inside Common Trusses.....	33
5. Main Ridge Beam	35
6. Front Dormer Face.....	38
7. Dormer Ridge Beam	40
8. Ceiling Joist Ledger Board	42
9. Ceiling Joists	44
10. Valley Rafters	46
11. Dormer Jacks	49

2. Inner Common Truss Layout


It is important to start the roof layout from the middle out. On the double top plates of front and back walls layout the position of the inner common trusses. Place the same marks on a 2x4, which will be used as a temp support for the Inner Common Trusses.

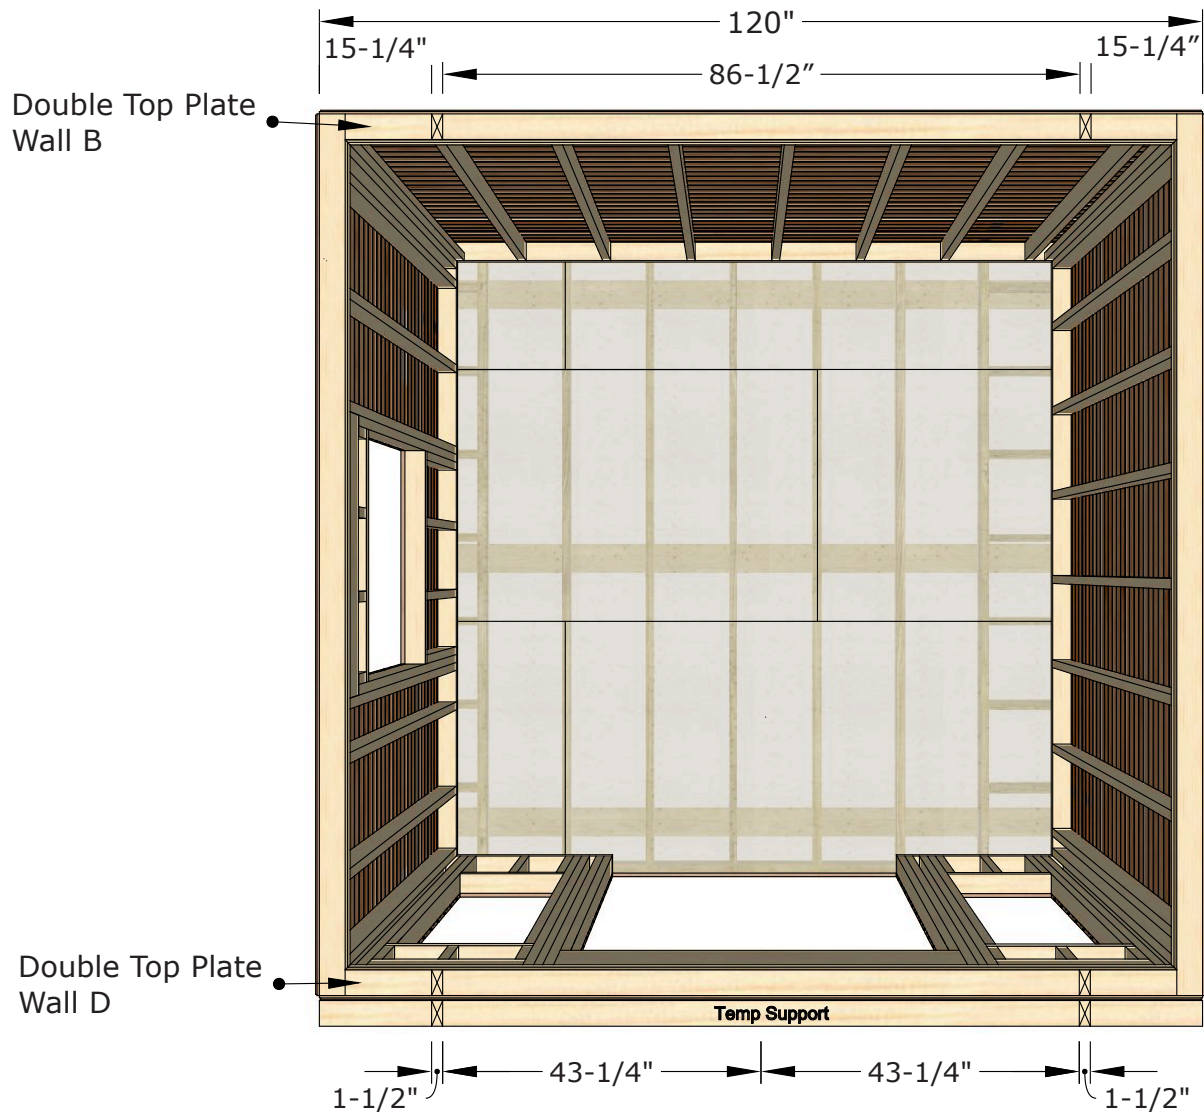

Gable End Truss continued

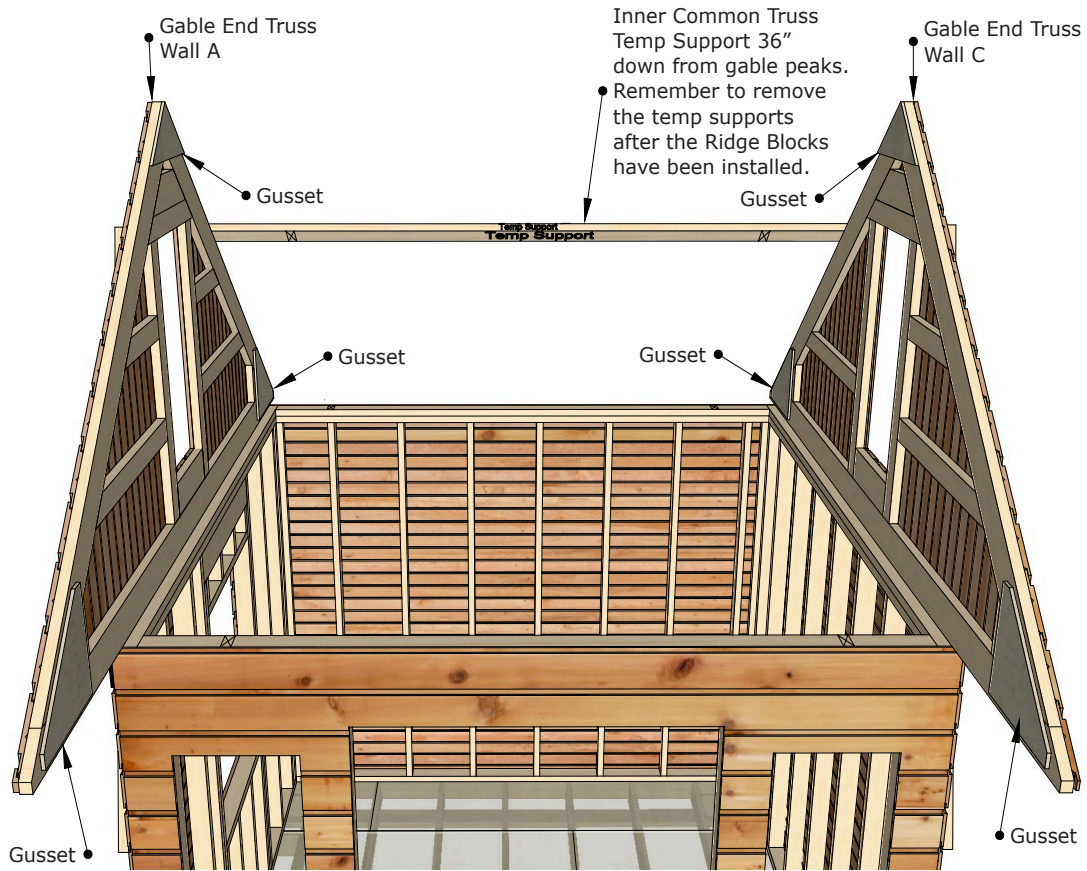


Measure down 36" from the peak of each Gable End Truss and attach the Inner Common Truss temp support that you marked out with the Double Top Plate.

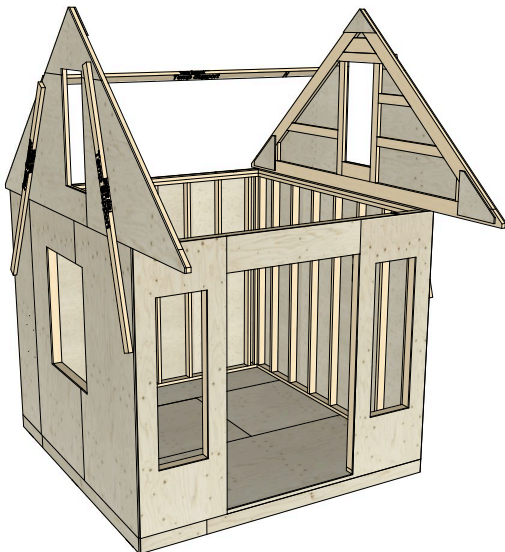

Whether assembling a pre-cut or pre-assembled kit, with or without an enhanced siding package, the walls and gable ends should be erected with the stabilizing effect of either plywood/OSB sheathing or siding already attached. With an enhanced siding upgrade the Ice & Water Shield on the gable ends is attached later in the assembly sequence.

21. Harp Walls

There are 7 pieces that make up a Harp Wall. The harp sits along side the Inner Common Truss and locks the Shed Dormer Back Wall to the Main Ridge.

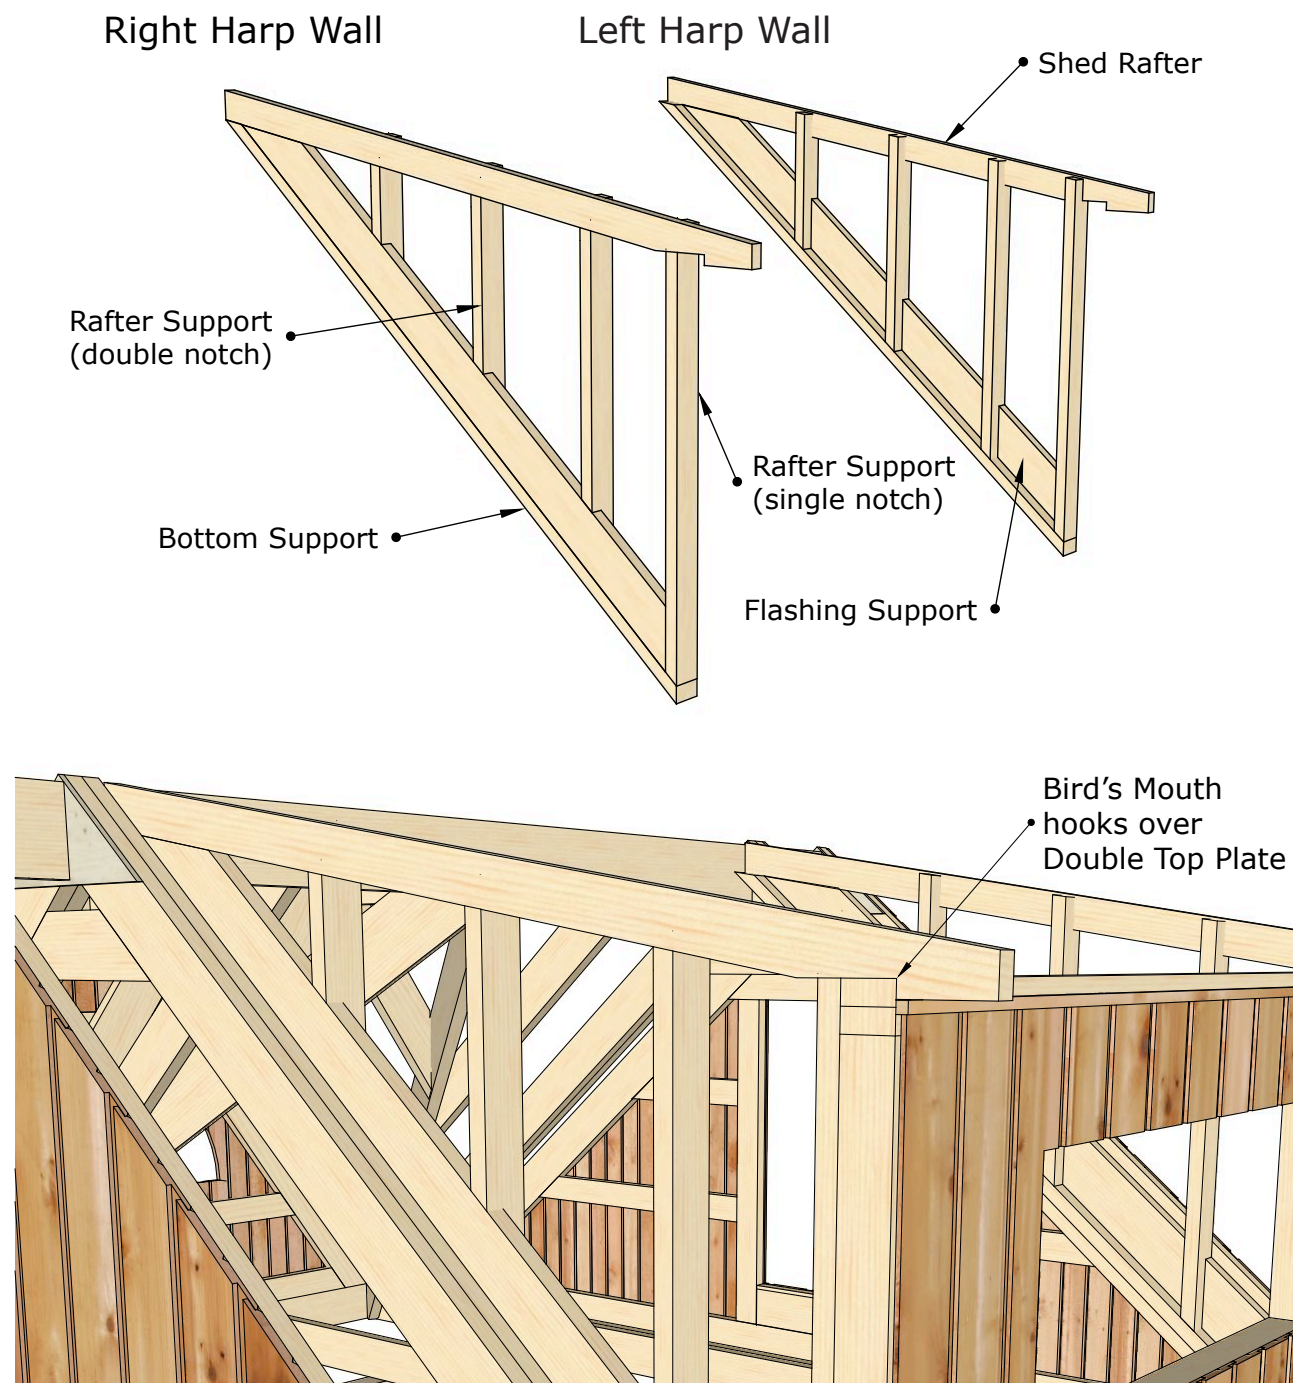

Ice & Water Shield continued

Lay the Ice & Water Shield on the entire Shed Roof and along the Back Gable and about 2" up the side of the Harp Walls along the Flashing Support.

